




D4383-1F WEARPAD



**D4383-1 WEARPAD
(MADE FROM D4383-1F)**

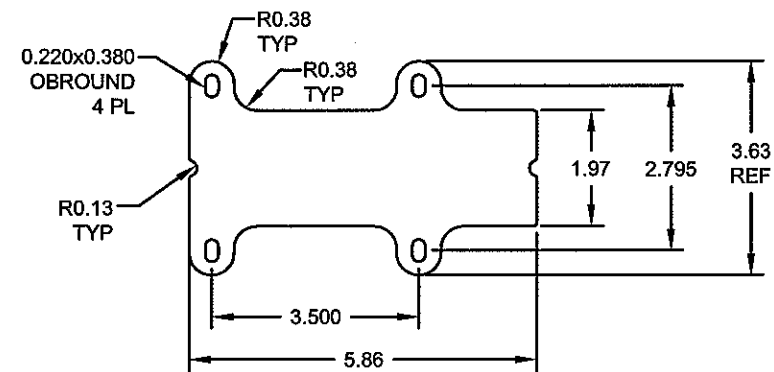


D4383-3F WEARPAD

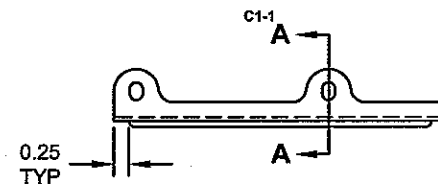

**D4383-3 WEARPAD
(MADE FROM D4383-3F)**

APPLY 2 LAYERS OF
2059B HARDCOAT WELDS
TO WITHIN 0.25 OF
WEARPAD ENDS
0.188 TO 0.250 THICK



SECTION A-A C4-1
C7-1

**PRELIMINARY
ISSUE**

NOTES:

- 1) MATERIAL: AISI 304/316 STAINLESS STEEL SHEET PER AMS 5513 OR AMS 5524
OR ASTM A240 OR ASME SA240
16 GAUGE (0.063 THICK), REF DART SPEC. M304S16GA
- 2) FINISH: NONE
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
- 6) IDENTIFICATION: N/A
- 7) AFTER FINISH, COAT ENTIRE TOP (CONCAVE) SURFACE WITH A LAYER OF
SIKAFLEX-241/-291OR PROSEAL 890 OR PROSEAL 1422 OR MIL-S-8802 CLASS B SEALANT
OR PLUS ONE ROCKGUARD 4714, 0.020-0.040 THICK
- 8) WEIGHT: D4383-1 = 0.28 lbs
D4383-3 = 0.39 lbs

PA1	NEW ISSUE	SC	11.03.28
REV.	DESCRIPTION	BY	DATE
DESIGN	SC	DART AEROSPACE USA INC. PORT HADLOCK, WA	
DRAWN	SC		
CHECKED		DRAWING NO.	REV. PA1
MFG. APPR.		D4383	SHEET 1 OF 1
APPROVED		TITLE	SCALE
DE APPR.		WEARPAD	NTS
DATE	11.03.28	COPYRIGHT © 2011 BY DART AEROSPACE USA, INC. <small>THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE USA INC.</small>	